

SPECIFICATION

Quality		: SONAR / SONAR LINES
Product definition		: tufted loop pile
Gauge		: 1/10"
No. of tufts	ISO 1763	: $\pm 181000/\text{m}^2$
Pile fibre		: 100% Solution Dyed Nylon
Pile weight		: $550 \text{ gr}/\text{m}^2 \pm 5\%$
Pile height	ISO 1766	: $3.50 \text{ mm} \pm 5\%$
Primary backing		: PA/PES non-woven - Colback
Tile backing		: Polyflex
Total thickness	ISO 1765	: $6.5 \text{ mm} \pm 5\%$
Total weight		: $4300 \text{ gr}/\text{m}^2 \pm 7,5\%$
Tile size		: $50 \times 50 \text{ cm } (\pm 19.7'' \times 19.7'')$
Tiles per box		: 20

PERFORMANCE

Use classification	method en 1307	: 33
Castor chair test	EN 985	: A, continuous use
Abrasion	EN 1963	: pass
Vettermann test	ISO 10361/EN 1471	: pass
Thermal isolation	ISO 8302	: $0.08 \text{ m}^2 \text{ K/W}$
Dimensional stability	EN 986	: pass
Luxury/Comfort	EN 1307	: classe 1
Sound Absorption	ISO 140-8	: 24 dB

ELECTROSTATIC PROPERTIES


Walk on test	ISO 6356	: -0.1 kV
Horizontal electrical resistance	ISO CD 10965	: $3 \times 10^8 \Omega$
Vertical electrical resistance	ISO CD 10965	: $4 \times 10^{10} \Omega$
Static loading		: anti-static

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: $B_{fl} - s1$
Hot metal nut test	BS 4790	: Low Radius

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: > 5
Rubbing, dry	ISO 105 X12	: 5.0
Rubbing, wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 5.0
Water	ISO 105 E01	: 4.5
Water stains	TNO W 6024	: 5.0

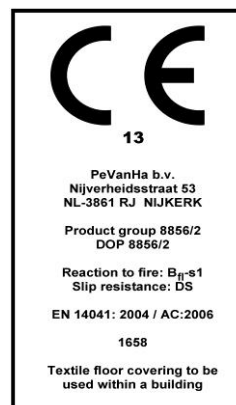

GENERAL

Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.
Pile direction:	Directional arrows are printed on the back of each tile.
	Best results are obtained when laid checkerboard.

Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m^2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.
----------------------	---

COLOURS

4520	4477	4478
	4420	4476

4178	4183
------	------

4483	4482	4441
4475	4472	4470

4578	4120
------	------

4575	4583
------	------

4175	4577	Bitumen Backing
		Felt Backing