


# Acoustic Carpet ( City & City Lines)

## Technical Data Sheet

**Raw Material**  
Polyamide

### City Acoustic Carpet Colours

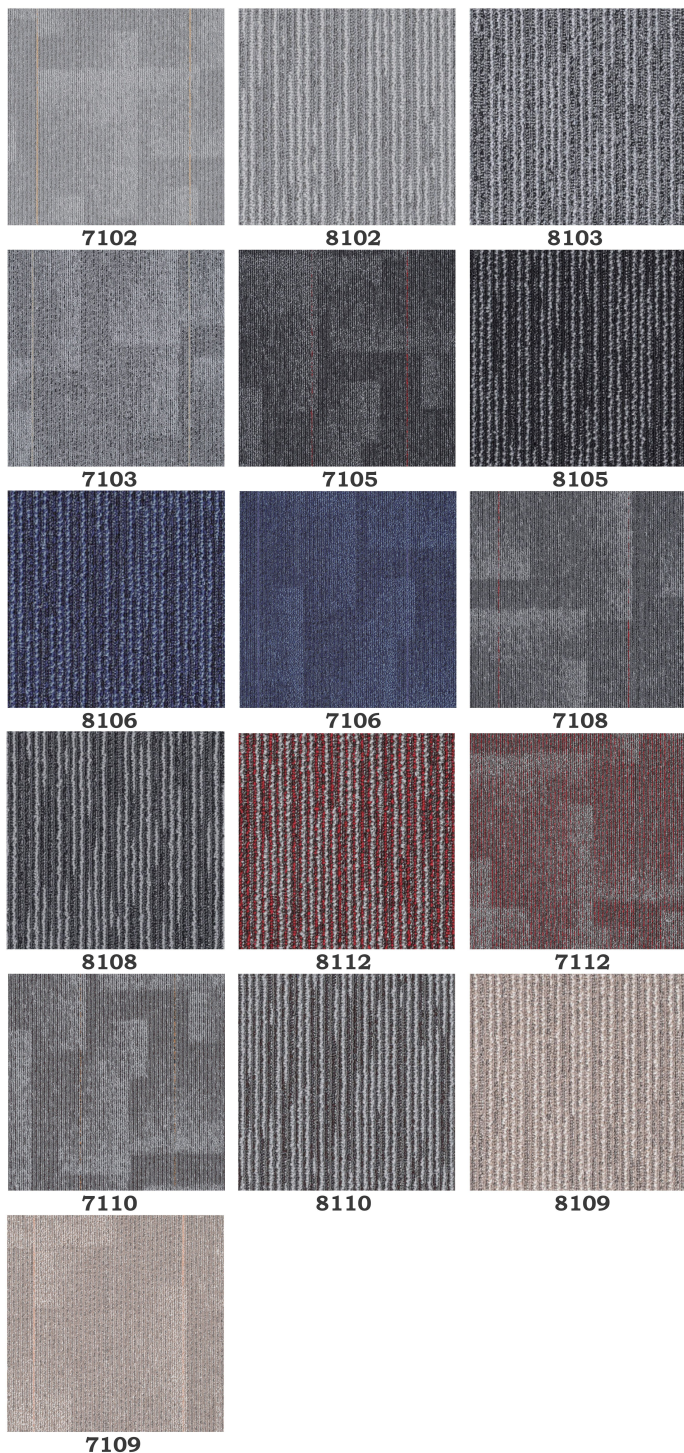

Our product, which prevents the entry of sound waves with variable frequencies in the existing space due to collision with the ground surface and allows the sound to be heard clearly, is a complementary tool in increasing the acoustic performance of spaces.

It enhances the quality of the place while taking it out of the ordinary with its rich color options

### The image of the use of Acoustic Carpet (City)



### DIMENSIONS

Width	Lenght	Thickness
500 mm	500 mm	7,5 mm

### Recommended Maintenance

Best results are obtained when cleaned a with dry shampoo method.

### Pile Direction

Directional arrows are printed on the back of each tile.  
Best results are obtained when laid checkerboard.

### Laying Instructions

-Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor.  
-When tiles are laid on parquet, vinyl or in open areas larger than 30 m<sup>2</sup> it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

### ELECTROSTATIC PROPERTIES

**Static Loading** : Anti-Static

### FLAME PROPERTIES

**Hot Metal Nut Test** BS 4790 : Low Radius

### COLOUR FASTNESS PROPERTIES

<b>Light</b>	ISO 105 B02	: 5,0
<b>Rubbing, Dry</b>	ISO 105 X12	: 5,0
<b>Rubbing, Wet</b>	ISO 105 X12	: 5,0
<b>Shampoo</b>	BS 1006	: 4,8
<b>Water</b>	ISO 105 E01	: 4,8

### PERFORMANCE

<b>Use Classification</b>		: 33
<b>Abrasion</b>	DIN 54322	: Pass
<b>Vettermann Test</b>	DIN 54323	: Pass
<b>Dimensional Stability</b>	NEN 6160	: Pass
<b>Thermal Isolation</b>	ISO 8302	: 0.10 m <sup>2</sup> K/W

<b>Product Definition</b>	: Multi-Level Loop Pile
<b>Gauge</b>	: 1/12"
<b>No. of Tufts</b>	ISO 1763 : 186.000/m <sup>2</sup>
<b>Stitches</b>	: 10 per inch
<b>Pile Weight</b>	: 680 gr/m <sup>2</sup>
<b>Pile Height</b>	ISO 1755 : 4,0 mm ± 0,5 mm
<b>Total Weight</b>	: 3930 gr/m <sup>2</sup>
<b>Primary Backing</b>	: PA/PES non-woven

<b>Tile Backing</b>		: E+ Bac (Bitumen Backing)
<b>Total Thickness</b>	ISO 1765	: 7,0 mm ± 0,5 mm
<b>Tile Size</b>		: 50 x 50 cm (± 19.7' x 19.7")
<b>Tiles Per Box</b>		: 20