

**Raw Material**  
Polyamide

### Long Acoustic Carpet Colours




6101




6102



6103

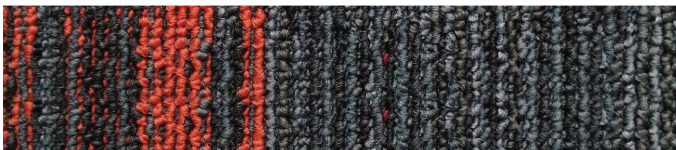


6104

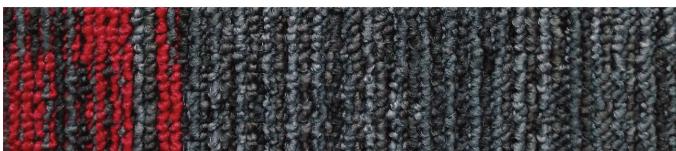

6105



6106

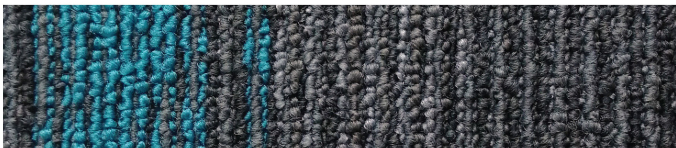

6107



6108

<b>Product Definition</b>	: Multi-Level Loop Pile
<b>Gauge</b>	: 1/12"
<b>No. of Tufts</b>	ISO 1763 : 186.000/m <sup>2</sup>
<b>Stitches</b>	: 10 per inch
<b>Pile Weight</b>	: 680 gr/m <sup>2</sup>
<b>Pile Height</b>	ISO 1766 : 4,0 mm ± 0,5 mm
<b>Total Weight</b>	: 3930 gr/m <sup>2</sup>
<b>Primary Backing</b>	: PA/PES non-woven

Our product, which prevents the entry of sound waves with variable frequencies in the existing space due to collision with the ground surface and allows the sound to be heard clearly, is a complementary tool in increasing the acoustic performance of spaces.

It enhances the quality of the place while taking it out of the ordinary with its rich color options

### The image of the use of Acoustic Carpet (Long)



### DIMENSIONS

Width	Lenght	Thickness
250 mm	1000 mm	7,5 mm

### Recommended Maintenance

Best results are obtained when cleaned a with diy shampoo method.

### Pile Direction

Directional arrows are printed on the back of each tile.  
Best results are obtained when laid checkerboard.

### Laying Instructions

-Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat,dry, non-slippery floor.  
-When tiles are laid on parquet, vinyl or in open areas larger than 30 m<sup>2</sup> it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

### ELECTROSTATIC PROPERTIES

**Static Loading** : Anti-Static

### FLAME PROPERTIES

**Hot Metal Nut Test** BS 4790 : Low Radius

### COLOUR FASTNESS PROPERTIES

<b>Light</b>	ISO 105 B02	: 5,0
<b>Rubbing, Dry</b>	ISO 105 X12	: 5,0
<b>Rubbing, Wet</b>	ISO 105 X12	: 5,0
<b>Shampoo</b>	BS 1006	: 4,8
<b>Water</b>	ISO 105 E01	: 4,8

### PERFORMANCE

<b>Use Classification</b>		: 33
<b>Abrasion</b>	DIN 54322	: Pass
<b>Vettermann Test</b>	DIN 54323	: Pass
<b>Dimensional Stability</b>	NEN 6160	: Pass
<b>Thermal Isolation</b>	ISO 8302	: 0.10 m <sup>2</sup> K/W

<b>Tile Backing</b>		: E+ Bac (Bitumen Backing)
<b>Total Thickness</b>	ISO 1765	: 7,0 mm ± 0,5 mm
<b>Tile Size</b>		: 25 x 100 cm
<b>Tiles Per Box</b>		: 20