


ESK102-112

Acoustic Wooden Panel

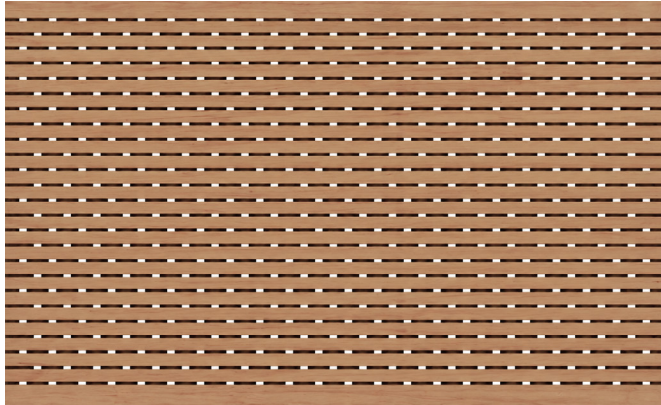

CEILING DIMENTIONS

Width	Lenght	Thickness
600 mm	600 mm	8,18 mm
517 mm	1381 mm	18 mm
600 mm	1200 mm	8,18 mm

WALL DIMENTIONS


Width	Lenght	Thickness
517 mm	1381 mm	18 mm
133 mm	2780 mm	18 mm
293 mm	2780 mm	18 mm
517 mm	2780 mm	18 mm
1029 mm	2780 mm	18 mm
581 mm	1180 mm	18 mm

INSTALLATION DETAIL

WALL INSTALLATION




Tongue&Groove




Biscuit


CEILING INSTALLATION




Grooved



Lay In





Lay On



Concealed

NRC 0,75 | EURO B

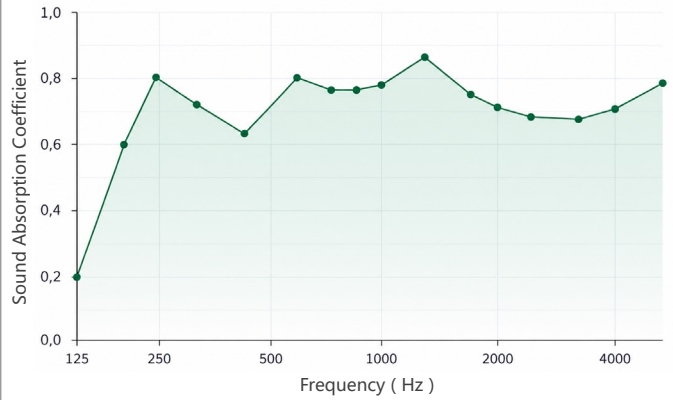

STANDARD PANEL

W: 517 X 1381 mm

C: 600 X 600 mm

TECHNICAL SPECIFICATION

Product Code ESK102-112

Panel Type Perforated – Grooved

NRC 0,75

S. Absorption Class B

FRONT SURFACE

Distance of Groove 16 mm

Groove Depth 6 mm

Groove Width 2 / 3 / 4 mm

BACK SURFACE

Perforation 2000 holes/m²

Hole Spacing 32 x 16 mm

Hole Diameter Ø 4 / 6 / 8 / 10 mm

GENERAL SPECIFICATIONS

Raw Material MDF
Fire Resistant
(750 kg/m³)

Raw Material Dim. 2100 x 2800 mm
1830 x 3660 mm

Application Wall – Ceiling

Surface Finishes MDF Lam
Natural Veneer
Lacquer Paint
Laminate Finish

Back Surface 0.2 mm Acoustic Fabric

Thickness (mm) 18 mm

Fire Class B-s1 , d0

Approx. Weight 11-12 kg/m²